





# C2-0307

## ROUND WORK LAMP




### APPLICATION


- Off- road vehicles & forklifts.

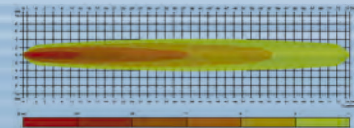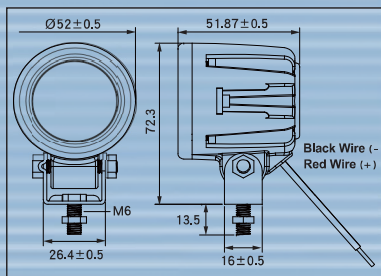

C2-0307-spot-10°



C2-0307-wide-40°



C2-0307-narrow-30°

### SPECIFICATION

		C2- 0307-10	C2- 0307-30	C2- 0307-15	C2- 0307-40
Spec	Nominal/ Input DC Voltage	10-80V	10-80V	10-80V	10-80V
	Nominal Current at	0.36A@12V	0.36A@12V 0.18A@24V 0.09A@48V	0.36A@12V	0.36A@12V 0.18A@24V 0.09A@48V
	Power Consumption	4W	4.3W	4W	4.3W
	LED	5W, Cree	5W	5W, Cree	5W
	Body	Aluminum			
	Lens	PC			
	IP Rating	67			
	Vibration	10G			
	EMC	EN50498	EN55015	EN50498	EN55015
Operation Temperature	-20°C ~ +60°C				
Photometric Spec.	Raw Lumen Output (Lm)	900	450	900	450
	Effective Lumen Output (Lm)	250	250	150	140
	Color Temperature (K)	6000~7000	5000~6300	6000~7000	5000~6300
	Beam Pattern	Spot	Spot	Narrow	Wide
Approval		-	-	UL	-