

INDICATOR LIGHT ROCKER SWITCHES SERIES



R13-307

R13-308

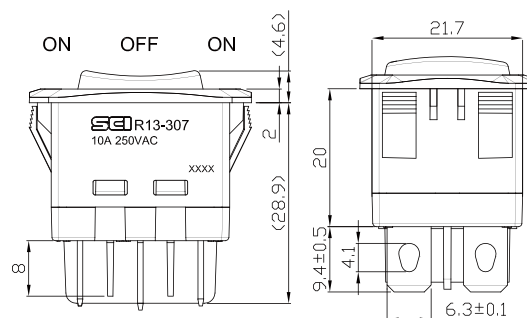
R13-309



Designed for visibility and control, our Indicator Light Switch Series integrates durable switches with built-in indicator lights, providing immediate status feedback at a glance. Ideal for vehicles, machinery, and control panels, these switches are available in various colors and configurations to suit different functional needs and environments.



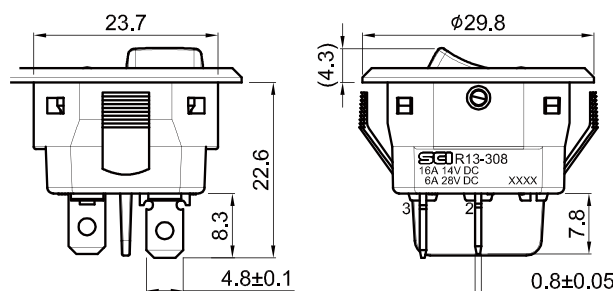




R13-307



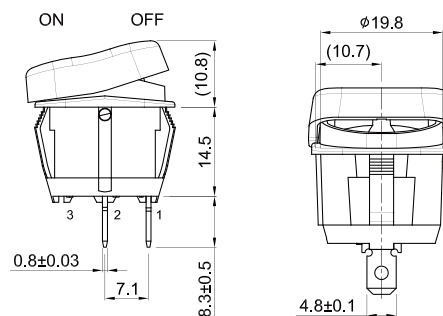
Rating	10A 250V AC	Mount Hole		Circuit Structure
Contact Resistance	50m ohm Max.			
Insulation Resistance	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1500V 1 minute			
Operation Temperature	-25°C~+85°C			
Switch Function	6P DPDT ON-OFF-ON	Thickness	X	Y
		0.75...1.25	29.8+0.1	22.2±0.1
		1.25...2	30.0+0.1	
		2...3	30.2+0.1	



R13-308



Rating	16A 14V DC 6A 28V DC 16A 125V AC 10A 250V AC	Mounting Hole	Circuit Diagram
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Operation Temperature	-25°C~85°C		
Switch Function	3P SPDT ON-OFF-ON		

R13-309



Rating	21A 14V DC 10A 28V DC	Mounting Hole		Circuit Diagram
Contact Resistance	50m ohm Max.			
Insulation Resistance	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1500V 1 minute			
Operation Temperature	-25°C~85°C			
Switch Function	2P SPST ON-OFF	Thickness: 2.0~3.0	Thickness: 0.7~3.0	