

DUAL COLOR MODE ROCKER SWITCHES



R13-260

R13-263

CONTROL PANEL FOR CONSTRUCTION VEHICLES

Equipped with a Dual color mode rocker switch, this panel allows operators to easily toggle between different lighting modes to suit various working conditions. Engineered for durability, the panel is built with high-quality materials to withstand harsh environments, offering intuitive control and reliable performance on any job site.



CONSTRUCTION VEHICLE CONTROL SERIES




R13-260



Rating	21A 14VDC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-25°C~+85°C
Switch Function	3P SPST ON-OFF

Mounting Hole			Circuit Diagram	
Thickness(mm)	X(mm)	Y(mm)		
0.75~1.25		36.6 ^{+0.2} ₋₀		
1.25~2.0	19.8 ^{+0.2} ₋₀	36.8 ^{+0.2} ₋₀		
2.0~3.0		37.0 ^{+0.2} ₋₀		

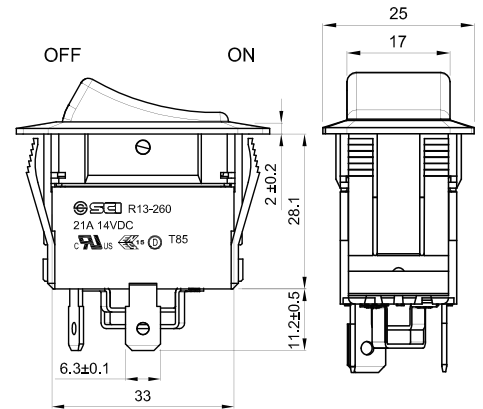


* Printed: Laser engrave.

R13-263



Rating	21A 14VDC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-25°C~+85°C
Switch Function	3P SPST ON-OFF

Mounting Hole			Circuit Diagram	
Thickness(mm)	X(mm)	Y(mm)		
0.75~1.25		36.6 ^{+0.2} ₋₀		
1.25~2.0	19.8 ^{+0.2} ₋₀	36.8 ^{+0.2} ₋₀		
2.0~3.0		37.0 ^{+0.2} ₋₀		

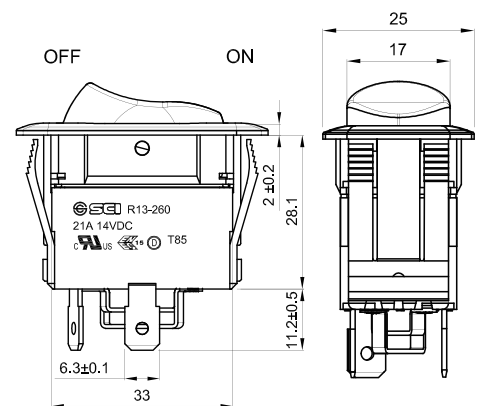

* Printed: Laser engrave.