



Battery switch

NEW


A23-16

- Continuous Rating:300A 50VDC Max.
- Intermittent Rating:500Amps
- Insulation Resistance : DC 1000V 100M ohm Min
- Switch Function:ON/OFF(Separate)
- Actuation Force: 7 ± 3 kgf-cm
- Actuator, Housing, Cover:PBT(UL flame:94V-0)
- Contact, Screw: copper alloy
- Nut:nickel plated brass
- Screw:M10x1.25Px22L/ Hex nut:M10x1.25P
- Operation Temperature : -20~+80℃
- Mounting pitch : 55mm

Mounting Hole		Actions Diagram	
A	B		
		ON	OFF / Actuator out

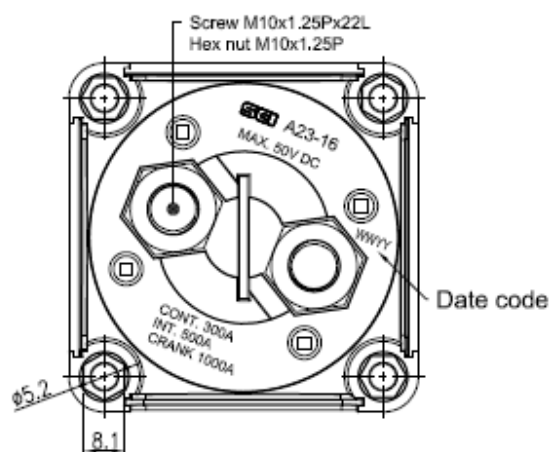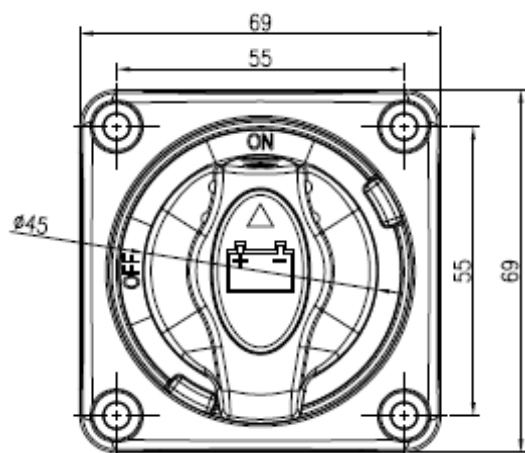

*All the specifications are subject to change without notice.



SCI
info@sci.com.tw

Headquarters:
TEL : 886-6-2532181
FAX : 886-6-2532633

Taipei Branch Office:
TEL : 886-2-25014062-4
FAX : 886-2-25040685

China Factory:
TEL : 86-752-3897988
FAX : 86-752-3897986
www.shinchin-sci.com

Hong Kong Branch:
TEL : 852-27939773
FAX : 852-27939830

Indonesia Factory:
TEL : 62-24-7627048
FAX : 62-24-7627047