


ACCESSORIES




Professional Parts for Manufacture and R&D

"We offer a variety of customized OEM services, owning a professional production facility and R&D team. We collaborate with customers to expand overseas markets and deal with challenges globally."




R3 - 111

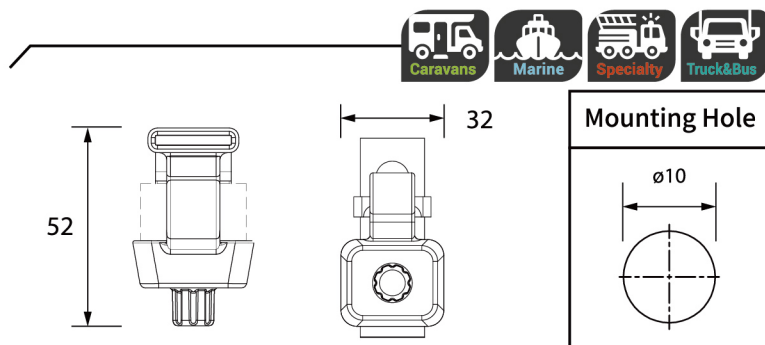

Technical Data

Rating :	58V DC. 300A
Current Rated :	M8 (SUS304)
Maximum Torque :	20 in - lb
Operating Temperature :	-25°C ~ +80°C
Fuse Type :	MRBF Fuse


R2 - 49

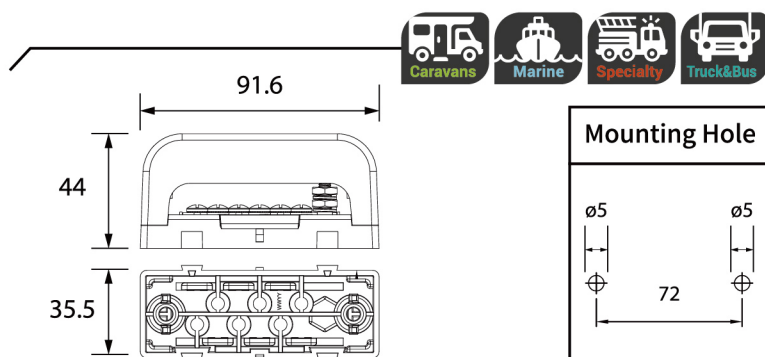

Technical Data

Voltage (Max) :	32V DC
Input Terminal Rating :	M5 threaded studs (100A Max)
Connection Pad	Input wire size : #4~6 AWG.
Option Available	Input wire size : #12~16 AWG.
Torque Rating :	20 in-lb (2.25Nm) max.
Mounting Torque Rating :	8 in-lb (0.9Nm) max.
Operating Temperature :	-25°C ~ +85°C

A25 - 8

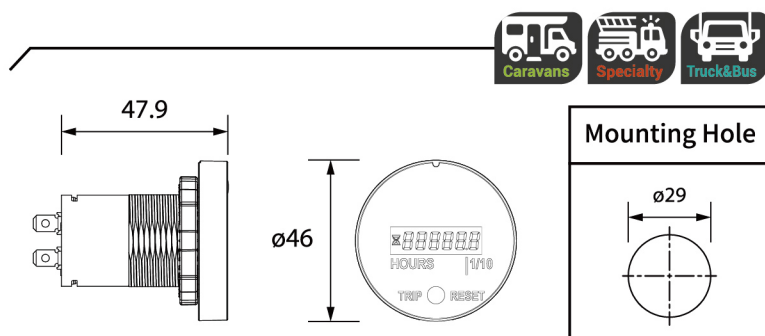

Technical Data

Operating Voltage :	9V ~ 48V DC
LCD digital display	
Hour Meter Capacity :	99,999 hours
Hour Meter Resolution :	0.1 H / 1H
Operating Current :	20 mA
Works on :	Lead - Acid Battery and Li - Ion Battery
Insulation Resistance :	DC 500V 100M Ω Min.
Operating Temperature :	-20°C ~ +60°C

▲ All the specifications are subject to change without notice.